

金方圆密封材料有限公司

XIXIA JINFANGYUAN SEALING MATERIALS CO.,LTD.



JFY-4203

JFY-4203 Pure PTFE Packing 聚四氟乙烯盘根

DESCRIPTION& APPLICATION描述&应用:

Braided from pure PTFE yarn, provides a low friction finish and prevents leakage through the braid. It is most useful in slower shaft speed applications. Applicable for seal packing of valves, vessels and pumps of corrosive medium in chemical, medicine, food.

是由纯聚四氟乙烯线编织而成。不含任何添加剂或浸渍任何油脂。适用于不允许有污染的场所。广泛应用于制药、食品加工、精细化工等不允许有污染的工业设备及装置。

GENERAL PARAMETER 一般参数:

Technical data	Rotating旋转泵	Reciprocating往复泵	Valves阀门
Pressure压力	2 Mpa	15 Mpa	20 Mpa
Shaft speed线速度	10 m/s rotary		
Temperature温度	-200℃ to +280℃		
PH range PH值	0~14		



JFY-4204

JFY-4204 PTFE Packing with Lubricant 聚四氟乙烯盘根(含油)

DESCRIPTION& APPLICATION描述&应用:

Braided from PTFE yarn with Lubricant, provides a low friction finish and prevents leakage through the braid. It is most useful in slower shaft speed applications. Applicable for seal packing of valves, vessels and pumps of corrosive medium in chemical, medicine, food.

是由含油四氟乙烯线编织而成。特殊润滑剂的添加可以有效改善盘根的润滑性,延长盘根的使用寿命。广泛应用于制药、食品加工、精细化工等不允许有污染的工业设备及装置。

GENERAL PARAMETER 一般参数:

Technical data	Rotating旋转泵	Reciprocating往复泵	Valves阀门
Pressure压力	2 Mpa	15 Mpa	15 Mpa
Shaft speed线速度	12 m/s rotary		
Temperature温度	-200℃ to +280℃		
PH range PH值	0~14		



JFY-4205

JFY-4205 Graphited PTFE Packing 石墨聚四氟乙烯盘根


DESCRIPTION& APPLICATION描述&应用:

Manufactured from PTFE yarn containing graphite particles; Recommended for shafts for almost all chemicals. Stability and long service life are achieved by low friction coefficient. It can be used to seal alkalis, solvents, water, steam, for centrifugal pumps, autoclaves, agitators, mixers, etc.

由石墨聚四氟乙烯线编织而成。由于特种石墨的加入,使其具有较小的摩擦力和良好的导热性,保护轴杆的作用,是一种理想的用途广泛的盘根。广泛应用于各行业,如化工、制药、轻工、造纸、反应釜、石油、发电等工业设备及装置。

GENERAL PARAMETER 一般参数:

Technical data	Rotating旋转泵	Reciprocating往复泵	Valves阀门
Pressure压力	2 Mpa	15 Mpa	15 Mpa
Shaft speed线速度	14 m/s rotary		
Temperature温度	-200℃ to +280℃		
PH range PH值	0~14		

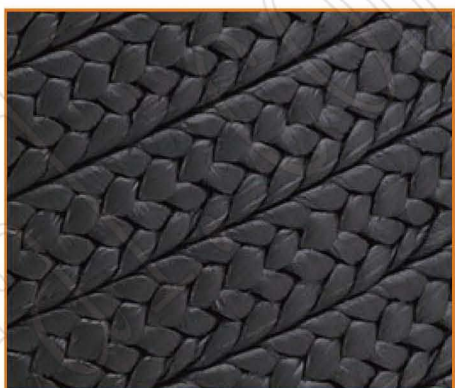

JFY-4206

JFY-4206 Graphited PTFE Packing with Lubricant 石墨聚四氟乙烯盘根(含油)

DESCRIPTION& APPLICATION描述&应用:

Manufactured from PTFE yarn containing graphite particles and anti-corrosive lubricant; Compare with graphited PTFE packing, it has the similar performance. The addition of anti-corrosive lubricant makes the packing good for the shafts. It can be used to seal alkalis, solvents, water, steam, for centrifugal pumps, autoclaves, agitators, mixers, etc.

由含油石墨聚四氟乙烯线编织而成。与石墨聚四氟乙烯盘根(无油)相比较特别添加了润滑剂,进一步改善盘根的润滑性。广泛应用于各行业,如化工、制药、轻工、造纸、反应釜、石油、发电等工业设备及装置。

GENERAL PARAMETER 一般参数:

Technical data	Rotating旋转泵	Reciprocating往复泵	Valves阀门
Pressure压力	2 Mpa	15 Mpa	15 Mpa
Shaft speed线速度	15 m/s rotary		
Temperature温度	-200℃ to +280℃		
PH range PH值	0~14		