


JFY-J400 Metal jacketed gasket 金属包覆垫片

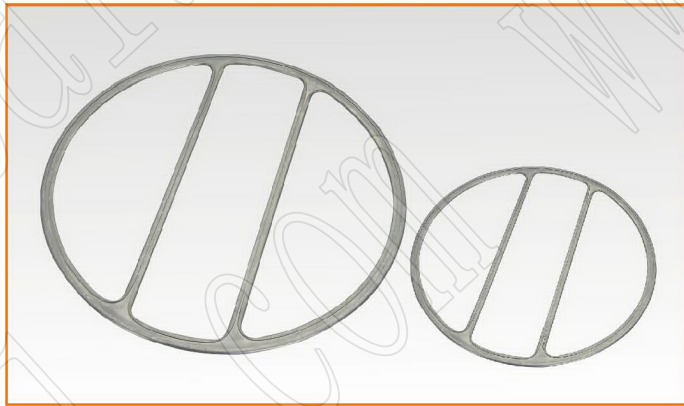


JFY-J400

DESCRIPTION& APPLICATION 描述&应用:

JFY-J400 is made of graphite, ceramic, non-asbestos etc. filler covered with thin metal jacket, such as stainless steel, carbon steel, copper etc. By their sealing efficiently, provide outstanding resilience, while the metal jacket guarantees excellent sealing and protects the filler against pressure conditions, fluctuating temperatures and corrosion.

JFY-J400以柔性石墨、陶瓷纤维、石棉及无石棉板作为填充，外包不锈钢、马口铁、紫铜等各种材质的金属薄板而成，特别适用热交换器、压力容器等高温高压密封部位。它有效防止垫片的散架、介质的侵蚀，同时也提高了耐压，适合于热交换器、气体管道、铸铁法兰、汽缸头以及锅炉及其它容器。

垫片形式 Type of Gasket

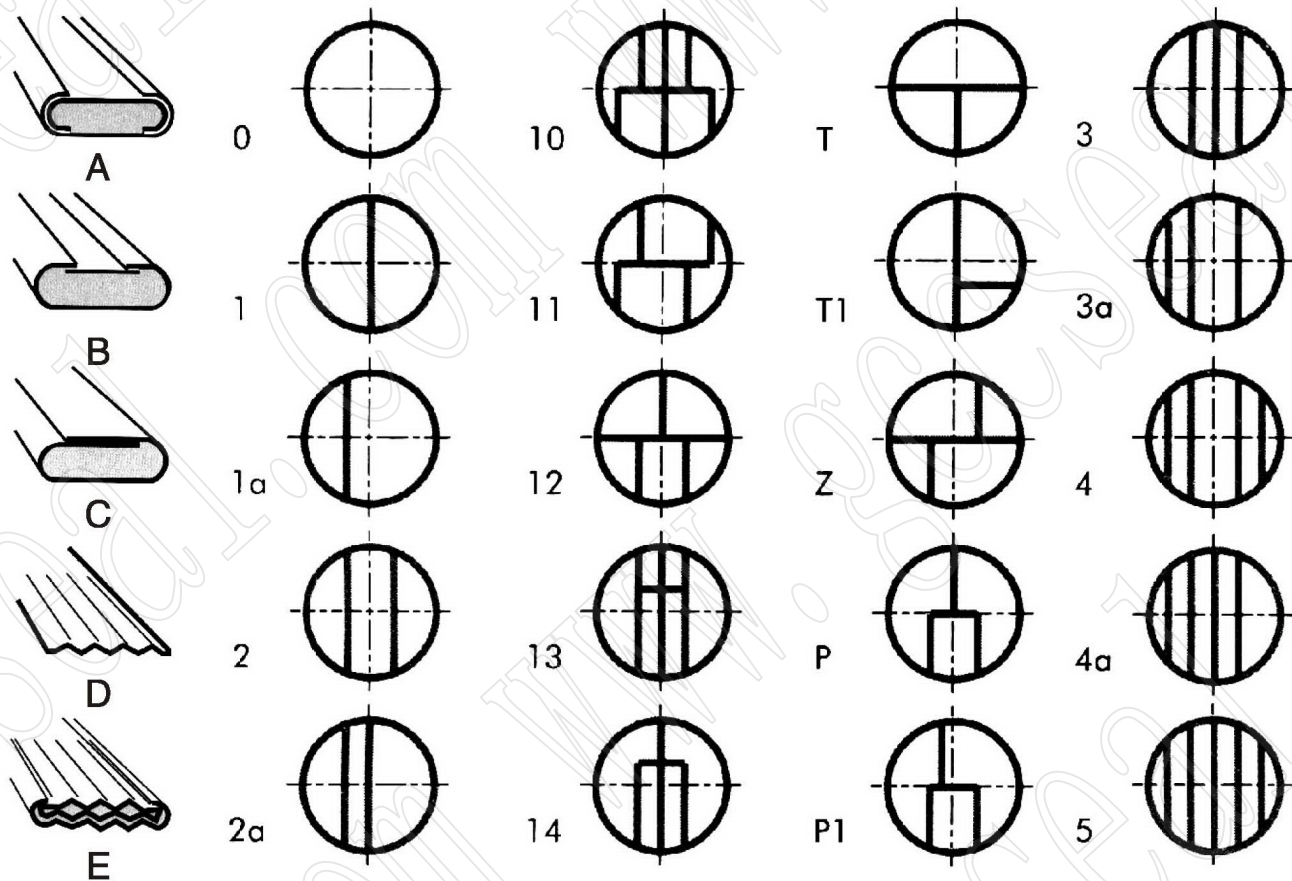

MATERIALS 可选材料:

Metal material 金属材料	Din Material 牌号No.	Hardness 硬度 HB	Temperature 温度 (°C)	Density 密度 g/cm³
CS/Soft Iron 碳钢、马口铁	1.1003/1.0038	90~120	-60~500	7.85
SS304, SS304L	1.4301/1.4306	130~180	-250~550	7.9
SS316, SS316L	1.4401/1.4404	130~180	-250~550	7.9
Copper 铜	2.0090	50~80	-250~400	8.9
Aluminum 铝	3.0255	20~30	250~300	2.73

Other special metal Ti, Mon 400 are also available on request. 其它特殊材料如钛、镍、蒙乃尔等可要求。